



**FEEL THE SW
DIFFERENCE™**

FULL LINE CATALOG

2019



CELEBRATING
35
YEARS

SW® IS ON A MISSION TO MAKE A DRAMATIC DIFFERENCE.
TO ENHANCE PEOPLE'S PRODUCTIVITY AND TO MAKE
PRODUCTS THAT DON'T SIMPLY PROTECT, BUT IMPROVE
PERFORMANCE THAT DRIVES BUSINESS SUCCESS.

OUR BUSINESS



PRIVATELY
HELD



WOMAN
OWNED



MINORITY
LED

OUR TEAM



2,000+
EMPLOYEES

100+
YEARS

INDUSTRY
EXPERIENCE



CALIFORNIA
BASED

MANUFACTURING



5 FACTORIES

WORLDWIDE




MANUFACTURING
& DISTRIBUTION



BEST IN CLASS
SERVICE & SUPPORT



DEDICATED
R&D TEAMS



INDUSTRY LEADING
HAND HEALTH TECHNOLOGIES



ENVIRONMENTALLY
FOCUSED

OUR PRODUCT PORTFOLIO

SW invests in manufacturing, R&D, and hand health technologies to provide premium products that protect and enhance worker performance. We have a distinct approach to hand protection. It involves thinking differently about ways to improve safety, comfort, and performance. And it is a difference you can feel.

SINGLE
USE

MECHANICAL
PROTECTION

CHEMICAL
PROTECTION

 TrueForm™

GRAPHEX™

TEXSOLV®

 PowerChem®

CORES SAFE®

 PowerForm®

 MegaMan®



SKIN HEALTH ALLIANCE
APPROVED

SW® products are the first single use gloves to be SHA approved:

- skin safe products
- global standard adherence
- low environmental impact
- independent assessments
- support skin charities



CONTENTS

SW® HAND HEALTH TECHNOLOGIES	8
Energel™	8
pH Natural®	8
Dry Core™	9
DriTek®	9
SW® PERFORMANCE TECHNOLOGIES	10
EcoTek®	10
TracTek®	10
Breach Alert™	11
GrepTile™	11
AxiFybr™	11
SINGLE USE STYLES	12
The New SW Widget	13
Model Numbers with Meaning	13
TrueForm™	14
PowerForm®	24
PowerChem™	36
MegaMan®	40
MECHANICAL PROTECTION	46
GraphEx™	48
CHEMICAL PROTECTION	52
TexSolv®	54
CoreSafe®	56
UNDERSTANDING CUT STANDARDS	58
UNDERSTANDING CHEMICAL STANDARDS	59
GLOVE SIZE SELECTION	60
THE SW® WIDGET ABBREVIATION GUIDE	61
SPECIFICATION GUIDE	62
CONTACT SW®	63




EcoTek®

FINALLY. BIODEGRADABILITY WITHOUT PERFORMANCE LOSS.

Introducing SW® EcoTek® Biodegradability Technology

A nitrile treatment that accelerates break-down in landfills without any performance loss.

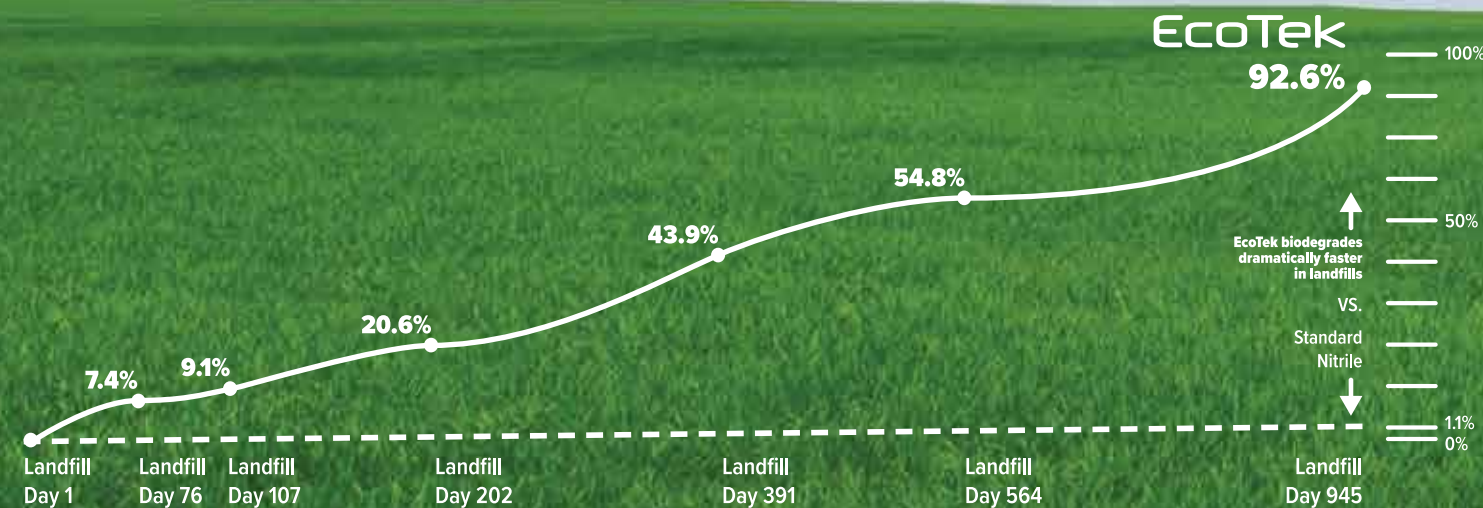

SW nitrile gloves with EcoTek biodegrade by 92.6% in only 2 years and 6 months under test method ASTM D5526-12, while competing products show virtually no degradation in the same period.

ASTM D5526-12 test results do not predict future biodegradation.

EcoTek® is available in 6 PowerForm® single-use nitrile styles.

PF	Model	Weight (large size)	Length	Thickness	Features	Color
PF	PF-065-090-ECO-BK	6.5g	9.0"	5.0 mil	EcoTek®	BLACK
PF	PF-065-095-NRG/ECO/BAL-GR/WT	6.5g	9.5"	4.9 mil	EnerGel™ Breach Alert™ EcoTek®	GREEN / WHITE
PF	PF-088-095-DRK/ECO-GY	8.8g	9.5"	6.2 mil	DriTek® EcoTek®	GRAY
PF	PF-065-095-ECO-TL	6.5g	9.5"	5.0 mil	EcoTek®	TEAL
PF	PF-075-095-ECO-LB	7.5g	9.5"	5.4 mil	EcoTek®	LIGHT BLUE
PF	PF-092-095-GPT/ECO-HVOR	9.2g	9.5"	6.0 mil	GripTile™ EcoTek®	HI-VIS ORANGE

And introducing NewTrile™ with EcoTek®. The industry's first nitrile chemical glove with biodegradability.



EnerGel™

Hydrates and rejuvenates hands for all-day comfort.
New patented additive clinically proven to improve hand health.

Available in these popular styles:

 **PowerForm®**
PF-065-095-NRG-LG
PF-065-095-NRG/ECO/BAL-GR/WT

 **MegaMan®**
MM-128-110-DRK/NRG-HVGR

 **TrueForm®**
TF-050-095-NRG-LG

Dry Core™

Naturally pulls sweat away from the skin for healthier hands.
Moisture-wicking system makes for a dry, comfortable environment.

Available in these popular styles:

 **PowerForm®**
PF-085-095-DCO-BL

pH Natural®

Actively maintains skin pH at natural levels to reduce skin issues.
Proprietary coating helps keep pH levels at 5.5, reducing microbial growth.

Available in these popular styles:

 **TrueForm®**
TF-051-095-PHN-BL

DriTek®

Moisture-wicking flock-lined system for drier, cooler, more comfortable hands.
Naturally manages sweat for healthier hands and easy donning and doffing.

Available in these popular styles:

 **PowerForm®**
PF-088-095-DRK/ECO-GY

 **MegaMan®**
MM-128-110-DRK-BK
MM-128-110-DRK/NRG-HVGR

EcoTek®

Proprietary nitrile treatment that dramatically accelerates landfill breakdown. Gloves break down 92.6% over 2.5 years without any impact on glove performance*.

Available in these popular styles:

- 

PF-065-090-ECO-BK
PF-065-095-ECO-TL
- PF-065-095-NRG/ECO/BAL-GR/WT
PF-075-095-ECO-LB
- PF-088-095-DRK/ECO-GY
PF-092-095-GPT/ECO-HVOR

*ASTM D5526-12 test results do not predict future biodegradation.

TracTek®

Proprietary matrixed pattern that provides dramatic control. Designed for maximum surface-to-surface contact, providing enhanced grip in all conditions.

Available in these popular styles:

- 

TF-090-095-TTK-NT
- 

PF-106-110-TTK/BAL-GR/YW

BreachAlert™

Dual color, 2-ply construction technology provides immediate visual breach detection. Two distinct polymer layers add durability and dramatically improve safety.

Available in these popular styles:

- 

PF-065-095-NRG/ECO/BAL-GR/WT
PF-106-110-TTK/BAL-GR/YW

GrepTile™

New, bio-inspired grip pattern for oily and wet conditions. Proprietary design enhances grip while maintaining dexterity.

Available in these popular styles:

- 

PF-092-095-GPT/ECO-HVOR

AxiFybr™

Proprietary molecularly-engineered yarn that dramatically enhances cut resistance. Provides the highest level cut protection with high glove comfort and dexterity.

Available in these popular styles:


- 

G45100 G46200
G66200

SINGLE USE STYLES

For decades SW® has been the premium manufacturer of single-use performance products. With a relentless focus on new manufacturing technologies and materials that drive innovation, SW® single-use styles continuously push the boundaries of quality and worker-enhancing performance that fuels business success.


The SW® Difference

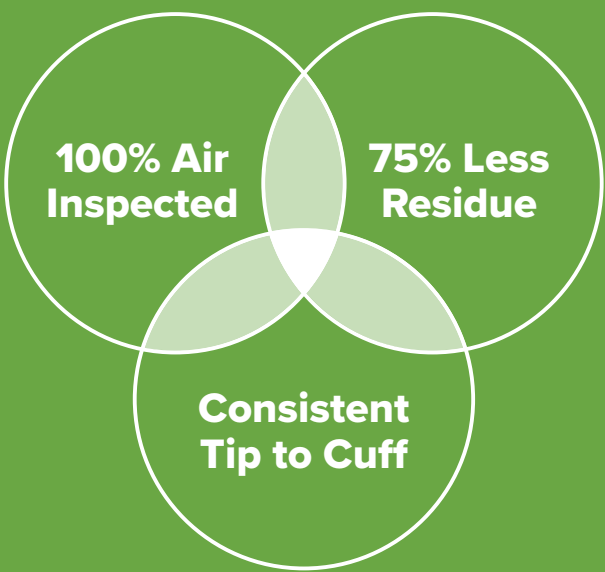

Better products start with better manufacturing.

THE NEW SW® WIDGET

The SW® Widget provides key details for single use models at-a-glance. This includes weight, length, thickness, key technology features, and color. Look for it through this catalog, on packaging, and in sales materials to provide immediate information about each glove.

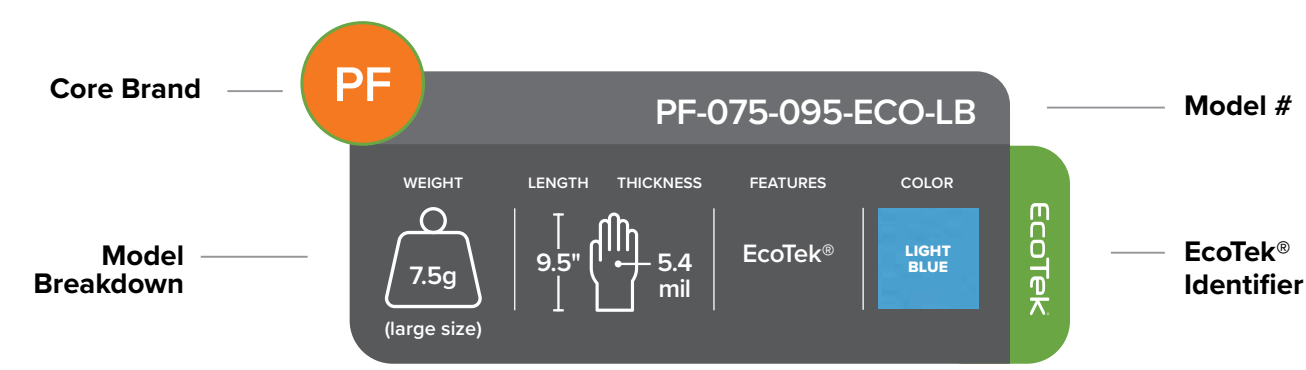

MODEL NUMBERS WITH MEANING

SW® has implemented a glove model naming convention that provides key product attributes in a systematic, easy-to-read format.

- **Core Brand:** a two-letter designator for TrueForm™ (TF), PowerForm® (PF), PowerChem™ (PC), and MegaMan® (MM).
- **Weight:** three-digit value for weight (in grams)
- **Length:** three-digit value for length (in inches). The weight and length values always correspond to a Large glove size.
- **SW® Features:** denotes all standout features, using a 3-letter “vanity plate” style abbreviation
- **Color:** a two-letter abbreviation for color. Gloves with interior and exterior colors will have two sets (exterior, then interior)

MM-128-110-DRK/NRG-BK

Core Brand		Weight			Length			SW Features						Color						
M	M	-	1	2	8	-	1	1	0	-	D	R	K	/	N	R	G	-	B	K
MegaMan®		12.8 grams			11 inches			DriTek® / EnerGel™						Black						

*The part numbers for ordering gloves (e.g., “N26088x”) have not changed.



QUALITY. COMFORT. DEXTERITY.

TrueForm™ is made for those who rely on daily hand protection to provide ease of use and high dexterity. With TrueForm™, quality is designed into every style using exacting manufacturing processes for tip-to-cuff consistency, glove after glove.



FIRST HAND

This new nitrile exam glove is destined to be the workhorse of any professional practice or facility. When your day-to-day depends on consistent quality protection, this is the glove to reach for to always deliver on expectations, every time.



TF-050-095-RB

NEW



RIGHT WEIGHT

At 5 grams and 3.1 mil thickness, it's not too heavy and not too light.

SAME SAME

Manufactured to be consistent and flat packed so each one dispenses with the same quality feel.

TF

TF-050-095-RB

WEIGHT	LENGTH	THICKNESS	COLOR
 5.0g (large size)	 9.5"	 3.1 mil	 ROYAL BLUE

THE REGULATOR

It is unusual to find a glove that actually works for you. pH Natural actively manages pH levels inside the glove, working towards a natural level of 5.5. This permanent coating does not transfer to hands or work surfaces and has been clinically proven to decrease redness and irritation. For some, it is the perfect addition to the exam gloves they wear every day.



TF-051-095-PHN-BL

pH Natural

pH Natural [PHN]



PH NATURAL

Works to maintain skin pH at natural levels to reduce skin issues. Proprietary coating helps keep pH levels at 5.5 reducing microbial growth.

QUALITY

100% air inspected and tip-to-cuff mil consistency make this glove the reliable choice for all-day wear.

TF

TF-051-095-PHN-BL

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 5.1g (large size)	 9.5"	 3.6 mil	 pH Natural®	 BLUE



Models & Ordering Information

TF-036-095-LB

(Supercede X3)

EXTRA THIN NITRILE EXAM GLOVE

- One of the thinnest exam quality gloves available
- Provides super fine dexterity and tactile sensitivity
- Achieves 1.0 AQL protection and unmatched comfort
- Lightly textured surface delivers added grip



TF

TF-036-095-RB

WEIGHT	LENGTH	THICKNESS	COLOR
3.6g (large size)	9.5"	2.5 mil	LIGHT BLUE

TF-050-095-NRG-LG

(AloeForm)

NITRILE EXAM GLOVES WITH ENERGEL™

- EnerGel™ hydrates and soothes dry, chapped skin
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff



TF

TF-050-095-NRG-LG

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
5.0g (large size)	9.5"	3.6 mil	EnerGel™	LIGHT GREEN

TF-050-095-RB

EVERYDAY NITRILE EXAM GLOVES

- The new lighter standard for everyday exam use
- Consistent quality glove to glove
- Beaded cuff allows easy donning and doffing

NEW



TF

TF-050-095-RB

WEIGHT	LENGTH	THICKNESS	COLOR
5.0g (large size)	9.5"	3.1 mil	ROYAL BLUE

ORDERING INFORMATION	
N091301	XS: 5.5-6
N091302	S: 6.5-7
N091303	M: 7.5-8
N091304	L: 8.5-9
N091305	XL: 9.5-10
XS-L 200 Gloves/Box 2000/Case	
XL 180 Gloves/Box 1800/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	4.3mil / 0.11mm
Palm Thickness	2.5mil / 0.06mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongated Before Aging	500%
Elongated After Aging	400%
Water Barrier (AQL)	1.0

STANDARDS & COMPLIANCE
EN 420:2003
EN 374-1:2016
EN 455:2000-2015
ASTM D6319-10
REACH EU 1907/2006
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600
EU Reg 528/2012



ORDERING INFORMATION	
N128401	XS: 5.5-6
N128402	S: 6.5-7
N128403	M: 7.5-8
N128404	L: 8.5-9
N128405	XL: 9.5-10
100 Gloves/Box 1000/Case	

PHYSICAL PROPERTIES	
Inner Surface	EnerGel
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	4.0mil / 0.10mm
Palm Thickness	3.6mil / 0.09mm
Tensile Strength Before Aging	22 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	560%
Elongated After Aging	550%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE
EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION	
N301341	XS: 5.5-6
N301342	S: 6.5-7
N301343	M: 7.5-8
N301344	L: 8.5-9
N301346	XL: 9.5-10
100 Gloves/Box 1000/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	4.7mil / 0.12mm
Palm Thickness	3.1mil / 0.08mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongated Before Aging	500%
Elongated After Aging	400%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE
EN 420:2003
EN 455:2000-2015
ASTM D6319-10
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600





Models & Ordering Information

TF-051-095-PHN-BL

(pH Natural)
NITRILE EXAM GLOVES WITH pH NATURAL®

- pH Natural® helps maintain pH levels for improved hand health
- Beaded cuff allows for easy donning and doffing
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



TF-060-095-BK

(Stellar X5)
LIGHT-TEXTURED NITRILE EXAM GLOVES

- Black nitrile helps mask contaminants and inks
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff



TF-066-095-SB

(Vertex X6)
PREMIER NITRILE EXAM GLOVES

- Higher quality examination grade glove
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff



ORDERING INFORMATION

N125331	XS: 5.5-6
N125332	S: 6.5-7
N125333	M: 7.5-8
N125334	L: 8.5-9
N125335	XL: 9.5-10

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	pH Natural
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	4.5mil / 0.11mm
Palm Thickness	3.6mil / 0.09mm
Tensile Strength Before Aging	24 MPa
Tensile Strength After Aging	21 MPa
Elongated Before Aging	580%
Elongated After Aging	550%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N015881	XS: 5.5-6
N015882	S: 6.5-7
N015883	M: 7.5-8
N015884	L: 8.5-9
N015885	XL: 9.5-10
N015886	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	5.1mil / 0.13mm
Palm Thickness	4.3mil / 0.11mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	580%
Elongated After Aging	560%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N010321	XS: 5.5-6
N010322	S: 6.5-7
N010323	M: 7.5-8
N010324	L: 8.5-9
N010325	XL: 9.5-10

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	5.1mil / 0.13mm
Palm Thickness	4.7mil / 0.12mm
Tensile Strength Before Aging	22 MPa
Tensile Strength After Aging	21 MPa
Elongated Before Aging	540%
Elongated After Aging	540%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
UL NFPA 1999-2018
FDA 21 CFR 177.2600





Models & Ordering Information

TF-075-120-LG

(PowerForm X5+)

EXTENDED CUFF NITRILE EXAM GLOVES

- Extra length cuff provides additional protection
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



TF

TF-075-120-LG

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
7.5g (large size)	12.0"	4.9 mil	Clean Washed Air Inspected	LIGHT GREEN

TF-090-095-TTK-NT

(Hypersense X9)

TRACTEK® PERFORMANCE GRIP IN A LATEX GLOVE

- TracTek® high density pattern for grip in wet / oily conditions
- High tactile sensitivity and comfort of natural latex
- Lightly textured surface delivers added grip
- Made with natural rubber latex



TF

TF-090-095-TTK-NT

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
9.0g (large size)	9.5"	6.3 mil	TracTek®	NATURAL

ORDERING INFORMATION	
N027401	XS: 5.5-6
N027402	S: 6.5-7
N027403	M: 7.5-8
N027404	L: 8.5-9
N027405	XL: 9.5-10
N027406	*2XL: 10.5-11
100 Gloves/Box 1000/Case	
*90 Gloves/Box 900/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12.0" / 305mm
Finger Thickness	5.9mil / 0.15mm
Palm Thickness	4.9mil / 0.12mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	19 MPa
Elongated Before Aging	580%
Elongated After Aging	550%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE
EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600

CE 0493

CLASSIFIED UL

ISO 374-1/TYP B JKT

EN ISO 374-5 VIRUS

TP TC 019/2011

EAC

TP TC 019/2011

APPROVED

ORDERING INFORMATION	
L009202	S: 6.5-7
L009203	M: 7.5-8
L009204	L: 8.5-9
L009205	XL: 9.5-10
100 Gloves/Box 1000/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	TracTek
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" /242mm
Finger Thickness	7.0mil / 0.18mm
Palm Thickness	6.3mil / 0.16mm
Tensile Strength Before Aging	22 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	775%
Elongated After Aging	650%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE
EN 420:2003
EN 455:2000-2015
ASTM D3578
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
UL NFPA 1999-2018
FDA 21 CFR 177.2600

CE 0493

CLASSIFIED UL

EN 374-1/TYP C

EN ISO 374-5

TP TC 019/2011

EAC

TP TC 019/2011

APPROVED



DESIGNED. ENGINEERED. PERFORMANCE.

PowerForm® brings new hand protection technologies to workplace performance. From sweat management to enhanced grip design, PowerForm® features enable workers to execute tasks with more confidence. PowerForm® focuses on functional advancements to optimize on-the-job performance every day.



A DOUBLE FEATURE

Made for those high-risk environments where, if there is a glove breach, you need to know now. The white interior of this dual layer glove provides an immediate sign of any puncture or compromise. In addition, EnerGel™ rejuvenates hands for long-term wear and EcoTek® accelerates glove breakdown in landfills.



PF-065-095-NRG/ECO/BAL-GR/WT

EnerGel [**NRG**]
EcoTek [**ECO**]
Breach Alert [**BAL**]

NEW



SEE IT
Dual-layer Breach Alert™ provides extra durability and security you can see.



AHHH
EnerGel™ hand rejuvenating technology hydrates and soothes for added comfort and hand health.

PF

PF-065-095-NRG/ECO/BAL-GR/WT

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 6.5g (large size)	 9.5"	 4.9 mil	EnerGel™ Breach Alert™ EcoTek®	 GREEN WHITE

EcoTek

GOOD
EcoTek® biodegradability technology breaks down in landfills for less environmental impact.

GRIP IT. GOOD.

Featuring our new GrepTile™ grip pattern designed to provide added holding power in wet and oily conditions. This high visibility glove is perfect for those challenging conditions where performance is crucial. And featuring EcoTek® for when responsibility is also important.



PF-092-095-GPT/ECO-HVOR

GrepTile [**GPT**]
EcoTek [**ECO**]

NEW



HOLD ON
GrepTile™ bio-inspired grip technology for more control in wet / oily conditions.



SEE HERE
High Visibility Orange color provides added safety in any work environment.

PF

PF-092-095-GPT/ECO-HVOR

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 9.2g (large size)	 9.5"	 6.0 mil	GrepTile™ EcoTek®	 HI-VIS ORANGE

EcoTek

GOOD BYE
EcoTek® biodegradability technology breaks down in landfills in less time.



Models & Ordering Information

PF-065-090-ECO-BK

(Stellar S6)
NITRILE EXAM GLOVES WITH ECOTEK®

- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® technology breaks down in landfills in less time



PF-065-095-ECO-TL

(PowerForm S6)
NITRILE EXAM GLOVES WITH ECOTEK®

- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® technology breaks down in landfills in less time



PF-065-095-NRG/ECO/BAL-GR/WT

DUAL LAYER NITRILE EXAM GLOVES WITH
ENERGEL™ and ECOTEK®

- EnerGel™ hand rejuvenating technology for comfort and hand health
- Breach Alert™ dual-layer provides extra durability and safety
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® technology breaks down in landfills in less time



NEW

ORDERING INFORMATION

N716882	S: 6.5-7
N716883	M: 7.5-8
N716884	M: 7.5-8
N716885	XL: 9.5-10
N716886	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.0" / 229mm
Finger Thickness	5.6mil / 0.14mm
Palm Thickness	5.0mil / 0.13mm
Tensile Strength Before Aging	22 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	540%
Elongated After Aging	520%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

ASTM D5526-12
ASTM D619-10
ASTM D6319-10
EN 420:2003
REACH EU 1907/2006
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N200362	S: 6.5-7
N200363	M: 7.5-8
N200364	L: 8.5-9
N200365	XL: 9.5-10
N200366	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	5.8mil / 0.15mm
Palm Thickness	5.0mil / 0.13mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	560%
Elongated After Aging	540%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

ASTM D5526-12
ASTM D619-10
ASTM D6319-10
EN 420:2003
REACH EU 1907/2006
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N189471	XS: 5.5-6
N189472	S: 6.5-7
N189473	M: 7.5-8
N189474	L: 8.5-9
N189475	XL: 9.5-10
N189476	2XL: 10.5-11

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	EnerGel / Breach Alert
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	5.9mil / 0.15mm
Palm Thickness	4.9mil / 0.13mm
Tensile Strength Before Aging	18 MPa
Tensile Strength After Aging	18 MPa
Elongated Before Aging	550%
Elongated After Aging	500%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D5526-12
ASTM D6319-10
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



PF-070-095-NRG-LG

(AloeForm X6)

NITRILE EXAM GLOVES WITH ENERGEL™

- EnerGel™ hydrates and soothes dry, chapped skin
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



PF-075-095-ECO-LB

(Supercede S6)

NITRILE EXAM GLOVES WITH ECOTEK®

- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® technology breaks down in landfills in less time



PF-084-105-HVOR

(Quasar X7)

HI-VIS NITRILE EXAM GLOVES

- High-Visibility Orange provides extra worker security and safety
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff



ORDERING INFORMATION

N129401	XS: 5.5-6
N129402	S: 6.5-7
N129403	M: 7.5-8
N129404	L: 8.5-9
N129405	XL: 9.5-10
N129406	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	EnerGel
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	5.9mil / 0.15mm
Palm Thickness	5.1mil / 0.13mm
Tensile Strength Before Aging	20 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	570%
Elongated After Aging	550%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N706312	S: 6.5-7
N706313	M: 7.5-8
N706314	M: 7.5-8
N706315	XL: 9.5-10
N706316	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	6.1mil / 0.16mm
Palm Thickness	5.4mil / 0.14mm
Tensile Strength Before Aging	22 MPa
Tensile Strength After Aging	21 MPa
Elongated Before Aging	590%
Elongated After Aging	570%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

EN 420:2003
ASTM D5526-12
REACH EU 1907/2006
EU 2016/425
FDA 21 CFR 177.2600



ORDERING INFORMATION

N017751	XS: 5.5-6
N017752	S: 6.5-7
N017753	M: 7.5-8
N017754	L: 8.5-9
N017755	XL: 9.5-10
N017756	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	10.5" / 267mm
Finger Thickness	5.6mil / 0.14mm
Palm Thickness	5.1mil / 0.13mm
Tensile Strength Before Aging	22 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	570%
Elongated After Aging	550%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
REACH EU 1907/2006
EU 2016/425
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
CAT III COMPLEX DESIGN
UL NFPA 1999-2018
FDA 21 CFR 177.2600



PF-085-095-DCO-BL

(Hydrex)

NITRILE EXAM GLOVES WITH DRY CORE®

- Dry Core® absorbent technology keeps hands dry and cool
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- ANSI Level 3 abrasion resistance



PF-088-095-DRK/ECO-GY

NITRILE EXAM GLOVES WITH DRITEK® and ECOTEK®

- DriTek® absorbent lining keeps hands dry and cool
- Fully textured surface delivers excellent grip
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® technology breaks down in landfills in less time
- ANSI Level 2 abrasion resistance



NEW

PF-088-095-LB

(Supercede X8)

HEAVIER DUTY NITRILE EXAM GLOVES

- Thicker mil tested for use with chemotherapy drugs
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff



ORDERING INFORMATION

N106551	XS: 5.5-6
N106552	S: 6.5-7
N106553	M: 7.5-8
N106554	L: 8.5-9
N106555	XL: 9.5-10
N106556	2XL: 10.5-11

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	Dry Core
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	6.9mil / 0.18mm
Palm Thickness	6.1mil / 0.16mm
Tensile Strength Before Aging	20 MPa
Tensile Strength After Aging	19 MPa
Elongated Before Aging	560%
Elongated After Aging	550%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 388:2016
EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
ANSI/ISEA 105-2016
FDA 21 CFR 177.2600



ORDERING INFORMATION

N260501	XS: 5.5-6
N260502	S: 6.5-7
N260503	M: 7.5-8
N260504	L: 8.5-9
N260505	XL: 9.5-10
N260506	2XL: 10.5-11


50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	DriTek
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	8.2mil / 0.21mm
Palm Thickness	6.2mil / 0.16mm
Tensile Strength Before Aging	15 MPa
Tensile Strength After Aging	16 MPa
Elongated Before Aging	550%
Elongated After Aging	500%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D5526-12
ASTM D6319-10
ASTM F739-12
EU 2016/425
ANSI/ISEA 105-2016
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N098312	S: 6.5-7
N098313	M: 7.5-8
N098314	M: 7.5-8
N098315	XL: 9.5-10
N098316	2XL: 10.5-11

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	7.2mil / 0.18mm
Palm Thickness	6.2mil / 0.16mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	580%
Elongated After Aging	540%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600





Models & Ordering Information

PF-092-095-GPT/ECO-HVOR

NITRILE EXAM GLOVES WITH GREPTILE™ and ECOTEK®

- GrepTile™ technology for maximum grip in wet/oily conditions
- High-Visibility Orange provides extra worker security and safety
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® technology breaks down in landfills in less time
- ANSI Level 3 abrasion resistance

NEW




PF-106-110-TTK/BAL-GR/YW

(PowerForm S8+)

DUAL LAYER NITRILE EXAM GLOVES WITH TRACTEK® and BREACH ALERT™

- Breach Alert™ dual-layer provides extra durability and safety
- TracTek® high density pattern for grip in wet / oily conditions
- Extended cuff provides added protection
- 100% air inspected / consistent thickness tip to cuff
- ANSI Level 2 puncture resistance

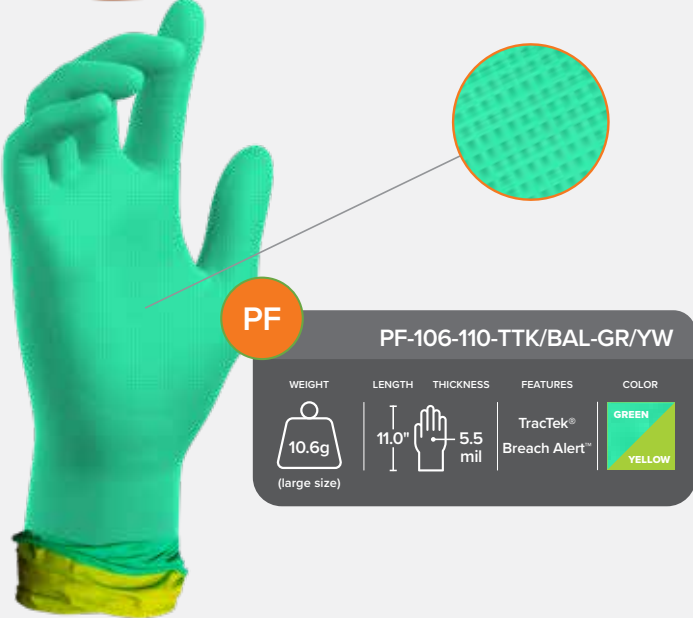

PF-107-120-TL

(PowerForm)

EXTENDED CUFF HEAVY DUTY NITRILE EXAM GLOVES

- Extended cuff provides added worker protection
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



ORDERING INFORMATION

N901752	S: 6.5-7
N901753	M: 7.5-8
N901754	L: 8.5-9
N901755	XL: 9.5-10
N901756	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	GrepTile
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	6.5mil / 0.17mm
Palm Thickness	6.0mil / 0.15mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongated Before Aging	500%
Elongated After Aging	400%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D5526-12
ASTM D6319-10
EU 2016/425
ANSI/ISEA 105-2016
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N807712	S: 6.5-7
N807713	M: 7.5-8
N807714	L: 8.5-9
N807715	XL: 9.5-10
N807716	2XL: 10.5-11
N807717	3XL: 11.5-12

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	TracTek
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	11.0" / 280mm
Finger Thickness	7.0mil / 0.18mm
Palm Thickness	5.5mil / 0.14mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	19 MPa
Elongated Before Aging	560%
Elongated After Aging	550%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

EN 388:2016
EN 420:2003
ASTM D6319-10
REACH EU 1907/2006
EU 2016/425
ANSI/ISEA 105-2016
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N127361	XS: 5.5-6
N127362	S: 6.5-7
N127363	M: 7.5-8
N127364	L: 8.5-9
N127365	XL: 9.5-10
N127366	2XL: 10.5-11

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12.0" / 305mm
Finger Thickness	7.1mil / 0.18mm
Palm Thickness	6.2mil / 0.16mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	20 MPa
Elongated Before Aging	575%
Elongated After Aging	560%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 420:2003
EN 455:2000-2015
ASTM D6319-10
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
UL NFPA 1999-2018
FDA 21 CFR 177.2600





INTRICATE. TECHNICAL. ADVANCED.

Born of SW® manufacturing capabilities and advancements in material science, PowerChem™ offers chemical protection for highly specific applications. SW® will be introducing new PowerChem™ styles that address a range of complex and specialized technical needs.





Models & Ordering Information

PC-079-095-GR

(NeoForm X8)
NEOPRENE EXAM GLOVES


- Tested for use with chemotherapy drugs
- Textured surface delivers excellent grip
- Beaded cuff allows easy donning and doffing
- Neoprene material for softness, elasticity and chemical resistance



PC-121-115-GR

(NeoForm X9+)
EXTENDED CUFF NEOPRENE EXAM GLOVES

- Extended cuff provides added protection
- Tested for use with chemotherapy drugs
- Textured surface delivers excellent grip
- Beaded cuff allows easy donning and doffing
- Neoprene material for softness, elasticity and chemical resistance

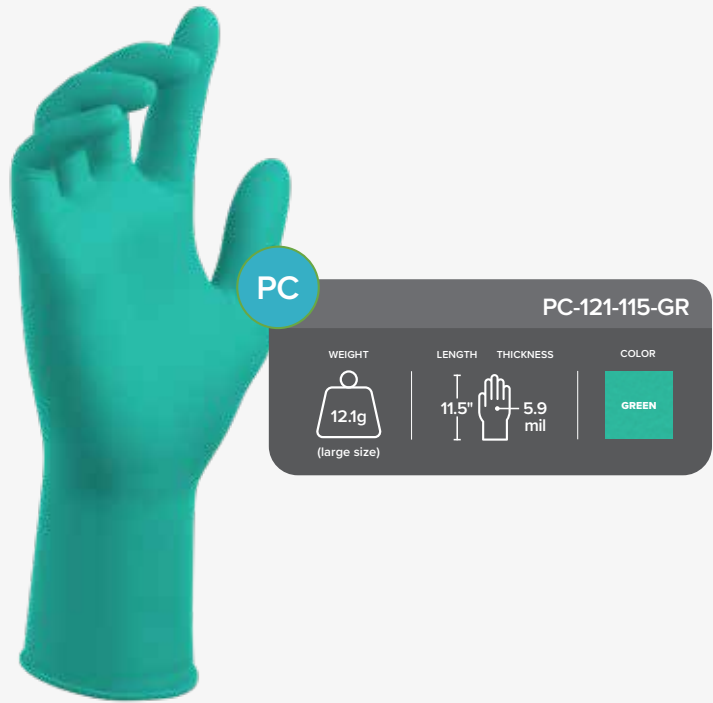

ORDERING INFORMATION		PHYSICAL PROPERTIES		STANDARDS & COMPLIANCE
K001401	XS: 5.5-6	Inner Surface	Smooth	EN 420:2003
K001402	S: 6.5-7	Outer Surface	Textured	EN 455:2000-2015
K001403	M: 7.5-8	Cuff Finish	Beaded	ASTM D6977
K001404	L: 8.5-9	Fit Type	Ambidextrous	ASTM F1671-13
K001405	XL: 9.5-10	Length	9.5" / 242mm	ASTM F739-12
K001406	2XL: 10.5-11	Finger Thickness	6.2mil / 0.16mm	REACH EU 1907/2006
100 Gloves/Box 1000/Case		Palm Thickness	4.7mil / 0.12mm	EU 2016/425
		Tensile Strength Before Aging	18 MPa	CAT III COMPLEX DESIGN
		Tensile Strength After Aging	18 MPa	FDA 21 CFR 177.2600
		Elongated Before Aging	750%	
		Elongated After Aging	700%	
		Water Barrier (AQL)	1.5	



ORDERING INFORMATION		PHYSICAL PROPERTIES		STANDARDS & COMPLIANCE
K071402	S: 6.5-7	Inner Surface	Smooth	EN 420:2003
K071403	M: 7.5-8	Outer Surface	Textured	EN 455:2000-2015
K071404	L: 8.5-9	Cuff Finish	Beaded	ASTM D6977
K071405	XL: 9.5-10	Fit Type	Ambidextrous	ASTM F1671-13
K071406	2XL: 10.5-11	Length	11.5" / 290mm	ASTM F739-12
50 Gloves/Box 500/Case		Finger Thickness	7.5mil / 0.19mm	REACH EU 1907/2006
		Palm Thickness	5.9mil / 0.15mm	EU 2016/425
		Tensile Strength Before Aging	18 MPa	CAT III COMPLEX DESIGN
		Tensile Strength After Aging	18 MPa	FDA 21 CFR 177.2600
		Elongated Before Aging	750%	
		Elongated After Aging	700%	
		Water Barrier (AQL)	1.5	





TOUGHER. ROUGHER. READY.

MegaMan® pushes the boundaries of single use hand protection performance – with new levels of abrasion resistance, sweat management, and comfort that deliver in exceedingly harsh environments. When protection performance matters most, it's no wonder MegaMan® gets the call for the toughest jobs.



GAME CHANGER

One of the most advanced single use gloves available. ANSI and EN Level 3 abrasion resistance and high visibility make it ready for the toughest working environments. DriTek® and EnerGel™ technologies assure long-lasting, all-day comfort.



MM-128-110-DRK/NRG-HVGR

AloeTuff

DriTek [DRK]

EnerGel [NRG]



HIGH SIGHT

High visibility green stands out in low light and hazardous conditions.

DRITEK® & ENERGEL™

With 2 advanced technologies hands are drier, cooler, and will be healthier after each use.

MM

MM-128-110-DRK/NRG-HVGR

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 12.8g (large size)	 11"	 8.5 mil	DriTek® EnerGel™	 HI-VIS GREEN

MULTILAYER CONSTRUCTION

ANSI and EN Level 3 abrasion resistance that lasts up to 3x longer.

MEGA TOUGH

The glove that set the new standard for single use protection. Featuring a consistent 8.5 mil thickness, ANSI Level 3 abrasion resistance, and DriTek® absorbent lining, it is ready to take the call for any job.



MM-128-110-DRK-BK

MegaMan

DriTek [DRK]



RELIABLY TOUGH

Consistent 8.5 mil thickness for tip to cuff consistency, and 100% air inspected.

NO SWEAT, IT'S DRITEK®

Moisture absorbent lining keeps hands dry, cool and healthy.

MM

MM-128-110-DRK-BK

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 12.8g (large size)	 11"	 8.5 mil	DriTek®	 BLACK

MULTILAYER CONSTRUCTION

ANSI and EN Level 3 abrasion resistance that lasts up to 3x longer.



Models & Ordering Information

MM-128-110-DRK-BK

(MegaMan)

HEAVY DUTY NITRILE EXAM GLOVES WITH DRITEK®

- Multilayer: lasts 3x longer, ANSI and EN Level 3 abrasion resistance
- DriTek® absorbent lining keeps hands dry and cool
- Fully textured surface delivers excellent grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff

MM-128-110-DRK/VND-BK

Available in vend-ready packages.

MM-128-110-DRK/NRG-HVGR

(AloeTuff)

HEAVY DUTY NITRILE EXAM GLOVES WITH DRITEK® and ENERGEL™

- Multilayer: lasts 3x longer, ANSI and EN Level 3 abrasion resistance
- Fully textured surface delivers excellent grip
- High-Visibility Green provides extra worker security and safety
- EnerGel™ hand rejuvenating technology for hand health
- DriTek® absorbent lining keeps hands dry and cool

MM-211-120-BL

(PowerForm S12+)

HEAVY DUTY EXTENDED CUFF NITRILE EXAM GLOVES

- Extended cuff provides added protection
- Fully textured surface delivers excellent grip
- 100% air inspected / consistent thickness tip to cuff
- Extra thickness for more durability



ORDERING INFORMATION

N260881	XS: 5.5-6
N260882	S: 6.5-7
N260883	M: 7.5-8
N260884	L: 8.5-9
N260885	XL: 9.5-10
N260886	2XL: 10.5-11
N260887	3XL: 11.5-12

50 Gloves/Box 500/Case

VEND PACK

N264882	S: 6.5-7
N264883	M: 7.5-8
N264884	L: 8.5-9
N264885	XL: 9.5-10
N264886	2XL: 10.5-11
N264887	3XL: 11.5-12

8 Gloves/Pack 800/Case

PHYSICAL PROPERTIES

Inner Surface	DriTek
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	11.0" / 280mm
Finger Thickness	10.1mil / 0.26mm
Palm Thickness	8.5mil / 0.22mm
Tensile Strength Before Aging	17 MPa
Tensile Strength After Aging	16 MPa
Elongated Before Aging	560%
Elongated After Aging	520%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

EN 388:2016
EN 420:2003
ASTM D6319-10
REACH EU 1907/2006
EU 2016/425
ANSI/ISEA 105-2016
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N263412	S: 6.5-7
N263413	M: 7.5-8
N263414	L: 8.5-9
N263415	XL: 9.5-10
N263416	2XL: 10.5-11


50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	DriTek / EnerGel
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	11.0" / 280mm
Finger Thickness	10.1mil / 0.26mm
Palm Thickness	8.5mil / 0.22mm
Tensile Strength Before Aging	17 MPa
Tensile Strength After Aging	16 MPa
Elongated Before Aging	560%
Elongated After Aging	520%
Water Barrier (AQL)	1.5

STANDARDS & COMPLIANCE

EN 388:2016
EN 420:2003
ASTM D6319-10
REACH EU 1907/2006
EU 2016/425
ANSI/ISEA 105-2016
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600



ORDERING INFORMATION

N772351	XS: 5.5-6
N772352	S: 6.5-7
N772353	M: 7.5-8
N772354	L: 8.5-9
N772355	XL: 9.5-10
N772356	2XL: 10.5-11

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12.0" / 305mm
Finger Thickness	14.0mil / 0.36mm
Palm Thickness	12.0mil / 0.31mm
Tensile Strength Before Aging	16 MPa
Tensile Strength After Aging	15 MPa
Elongated Before Aging	575%
Elongated After Aging	560%
Water Barrier (AQL)	0.65

STANDARDS & COMPLIANCE

EN 420:2003
ASTM D6319-10
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN
FDA 21 CFR 177.2600





MECHANICAL PROTECTION

SW® has brought its innovation and hand health mindset to cut-resistant gloves. Our new products are developed in the service of protecting workers and giving them more comfort and confidence to make them more successful every day.



THE INDUSTRIAL UPGRADE

GRAPHEX™ is a new line of hand protection featuring our AxiFybr™ cut-resistant technology.

Proprietary AxiFybr yarn is engineered at the molecular level enabling GraphEx™ products to provide the highest level of cut protection without loss of comfort, fit or flexibility.



GRAPHEX™

featuring

AxiFybr

GRAPHEX™ with AxiFybr™ Cut-Resistant Technology
48% stronger, **21%** more cut-resistant, and **2X** more abrasion-resistant than the competition.

GRAPHEX™

G45100



GRAPHEX™

G46200



GRAPHEX™

G66200



*See page 51 for ordering information.
For samples, visit [go.SWSafety.com/GraphEx](https://www.swsafety.com/graphex)*




TOUCH SCREEN

Even at advanced abrasion levels, these are touch screen compatible.

HAND SAFE

Received Skin Health Alliance global dermatological accreditation.



AXIFYBR TOUGH

Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.

VISIBLE

Hi-Vis cuff provides instant indication of specific cut level and size from a distance.

GRAPHEx™

featuring
AxiFybr

Cut-Resistant Gloves with AxiFybr™

PRODUCT ATTRIBUTES

SPECIFICATIONS	G45100	G46200	G66200
PRODUCT TYPE:	Cut-Resistant	Cut-Resistant	Cut-Resistant
CUT LEVEL:	ANSI A4 — EN388 D	ANSI A4 — EN388 D	ANSI A6 — EN388 F
ABRASION LEVEL:	ANSI 5 — EN388 4	ANSI 6 — EN388 4	ANSI 6 — EN388 4
LINER MATERIAL:	AxiFybr™	AxiFybr™	AxiFybr™
COATING MATERIAL:	Micro Porous Nitrile	Micro Porous Nitrile	Micro Porous Nitrile
LINER COLOR:	Gray	Gray	Gray
COATING COLOR:	Black	Black	Black
GRIP FINISH:	Smooth	Sandy	Sandy
CONSTRUCTION:	Knit	Knit	Knit
FIT TYPE:	Hand Specific	Hand Specific	Hand Specific
CUFF STYLE:	Knit Wrist	Knit Wrist	Knit Wrist
GAUGE:	18 Gauge	18 Gauge	13 Gauge
LENGTH:	10.2"	10.2"	10.2"

*Specifications based on size large gloves

INTEGRATED TECHNOLOGIES

- AxiFybr cut resistance technology is 48% stronger and offers 21% more cut resistance
- Proprietary coating technology provides up to level 6 abrasion rating, offering 2 times higher abrasion resistance while maintaining fit, feel and comfort

CHARACTERISTICS

- No fiberglass
- No silicone
- Form Fitted
- Hi-Vis Cuff
- Pre Washed
- Touchscreen Compatible

STANDARDS & CERTIFICATIONS

	G45100	G46200	G66200
EN 420:2003+A1: 2009 EN 388:2016 21CFR 177.1520 Please visit swsafety.com/symbols for information on standards used in this document			



G45100 ORDERING INFORMATION

G451002	S: 7
G451003	M: 8
G451004	L: 9
G451005	XL: 10
G451006	2XL: 11
12 Pairs per bag, 6 Bags per Case	

G46200

G462002	S: 7
G462003	M: 8
G462004	L: 9
G462005	XL: 10
G462006	2XL: 11
12 Pairs per bag, 6 Bags per Case	

G66200

G662002	S: 7
G662003	M: 8
G662004	L: 9
G662005	XL: 10
G662006	2XL: 11
12 Pairs per bag, 6 Bags per Case	

INDUSTRIES

- Aerospace
- Automotive
- Handling parts with sharp edges and burrs
- HVAC Installers
- Machinery & Equipment
- Metal Fabricating
- White Goods



CHEMICAL PROTECTION

SW® is advancing materials science and new manufacturing processes to develop chemical protection products with exact safety specifications while maintaining a focus on work comfort and hand health. Look for our chemical offer to expand in the near future.



LINED YOUR WAY
Available in flock-lined
and unlined styles

TEXSOLV®

Chemical-Resistant Nitrile Gloves

PRODUCT ATTRIBUTES

SPECIFICATIONS	TEXSOLV® U11	TEXSOLV® U15	TEXSOLV® F15
PRODUCT TYPE:	Chemical-Resistant	Chemical-Resistant	Chemical-Resistant
PUNCTURE LEVEL:	ANSI 2 — EN388 1	ANSI 3 — EN388 2	ANSI 3 — EN388 2
ABRASION LEVEL:	ANSI 6 — EN388 3	ANSI 6 — EN388 4	ANSI 6 — EN388 4
LINER MATERIAL:	Unlined	Unlined	Advanced Flocking
COATING MATERIAL:	Nitrile	Nitrile	Nitrile
COLOR:	Green	Green	Green
GRIP FINISH:	Recessed Diamond	Recessed Diamond	Recessed Diamond
CONSTRUCTION:	Unsupported	Unsupported	Unsupported
CUFF STYLE:	Hand Specific	Hand Specific	Hand Specific
FIT TYPE:	Straight	Straight	Straight
THICKNESS:	11 mil	15 mil	15 mil
LENGTH:	13"	13"	13"
ORIGIN COUNTRY:	China	China	China

*Specifications based on size large gloves

STANDARDS & CERTIFICATIONS

	TEXSOLV® U11	TEXSOLV® U15	TEXSOLV® F15
FDA 21 CFR 177.2600 COMPONENT MATERIALS COMPLY WITH FDA REGULATIONS FOR FOOD CONTACT	ANSI 6 ABRASION ANSI 2 PUNCTURE ISO 374-1:2016/TYPE A J K L N O T EN 388:2016 3 0 0 1 X EN 374-5:2016 Biohazard symbol CE 0493 APPROVED	ANSI 6 ABRASION ANSI 3 PUNCTURE ISO 374-1:2016/TYPE B A J K L EN 388:2016 4 1 0 2 X EN 374-5:2016 Biohazard symbol CE 0493 APPROVED	ANSI 6 ABRASION ANSI 3 PUNCTURE ISO 374-1:2016/TYPE B A J K L EN 388:2016 4 1 0 2 X EN 374-5:2016 Biohazard symbol CE 0493 APPROVED
Please visit swsafety.com/symbols for information on standards used in this document			

U11 ORDERING INFORMATION

N501092	S: 7
N501093	M: 8
N501094	L: 9
N501095	XL: 10
N501096	2XL: 11
12 Pairs per bag, 12 Bags per Case	

U15

N505092	S: 7
N505093	M: 8
N505094	L: 9
N505095	XL: 10
N505096	2XL: 11
12 Pairs per bag, 12 Bags per Case	

F15

N515092	S: 7
N515093	M: 8
N515094	L: 9
N515095	XL: 10
N515096	2XL: 11
12 Pairs per bag, 12 Bags per Case	

INDUSTRIES

- Boat Manufacturing
- Chemical
- Food
- Housekeeping
- Janitorial
- Machinery & Equipment
- Transportation

CORES SAFE® F13Y

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES FLOCK-LINED

Flock-lined 13 mil natural rubber chemical resistance with a fish scale surface.



CORES SAFE® F28O

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES FLOCK-LINED

Flock-lined 28 mil natural rubber chemical resistance with a raised diamond surface



CORES SAFE® U17N

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES UNLINED

Unlined 17 mil natural rubber chemical resistance with a fish scale surface.



CORES SAFE® U13B

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES UNLINED

Unlined 13 mil natural rubber chemical resistance with a fish scale surface.



CORES SAFE® F28YB

NATURAL RUBBER & NEOPRENE CHEMICAL-RESISTANT GLOVES FLOCK-LINED

Flock-lined neoprene over natural rubber chemical resistance with a raised diamond surface.



CORES SAFE®

Natural rubber protection in lined and unlined styles that provide comfort, flexibility, and easy donning and doffing for many acids, alkalis, chemicals, gases and vapors.

PRODUCT ATTRIBUTES					
SPECIFICATIONS	F13Y	F28O	U13B	U17N	F28YB
PRODUCT TYPE:	Chemical-Resistant	Chemical-Resistant	Chemical-Resistant	Chemical-Resistant	Chemical-Resistant
PUNCTURE LEVEL:	ANSI 1	ANSI 2	ANSI 1	ANSI 1	ANSI 1
ABRASION LEVEL:	ANSI 3	ANSI 3	ANSI 3	ANSI 3	ANSI 3
LINER MATERIAL:	Cotton Flock	Cotton Flock	Unlined	Unlined	Cotton Flock
LINER COLOR:	White	White	Unlined	Unlined	White
COLOR:	Yellow	Orange	Blue	Natural	Blue / Yellow
GRIP FINISH:	Fish Scale	Raised Diamond	Fish Scale	Fish Scale	Raised Diamond
CONSTRUCTION:	Unsupported	Unsupported	Unsupported	Unsupported	Unsupported
FIT TYPE:	Hand Specific	Hand Specific	Hand Specific	Hand Specific	Unsupported
CUFF STYLE:	Straight	Straight	Straight	Straight	Straight
THICKNESS:	13 mil	28 mil	13 mil	17 mil	28 mil
LENGTH:	12"	13"	12"	12"	13"
ORIGIN COUNTRY:	China	China	China	China	China

*Specifications based on size large gloves

STANDARDS & CERTIFICATIONS					
FDA 21 CFR 177.2600	F13Y	F28O	U13B	U17N	F28YB
Please visit swsafety.com/symbols for information on standards used in this document					

F13Y ORDERING INFORMATION

L513002	S: 7
L513003	M: 8
L513004	L: 9
L513005	XL: 10
12 Pairs per bag, 12 Bags per Case	

F28O

L519012	S: 7
L519013	M: 8
L519014	L: 9
L519015	XL: 10
12 Pairs per bag, 12 Bags per Case	

U13B

L503072	S: 7
L503073	M: 8
L503074	L: 9
L503075	XL: 10
12 Pairs per bag, 12 Bags per Case	

U17N

L507032	S: 7
L507033	M: 8
L507034	L: 9
L507035	XL: 10
12 Pairs per bag, 12 Bags per Case	

F28YB

L519252	S: 7
L519253	M: 8
L519254	L: 9
L519255	XL: 10
12 Pairs per bag, 12 Bags per Case	



INDUSTRIES

- Boat Manufacturing
- Chemical
- Food
- Housekeeping
- Janitorial
- Machinery & Equipment
- Transportation

UNDERSTANDING CUT STANDARDS


EN388
EUROPEAN STANDARD

Uses Coup Test as well as the TDM-100 cut machine to test cut level (ISO 13997)

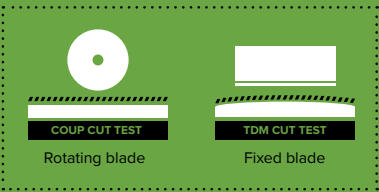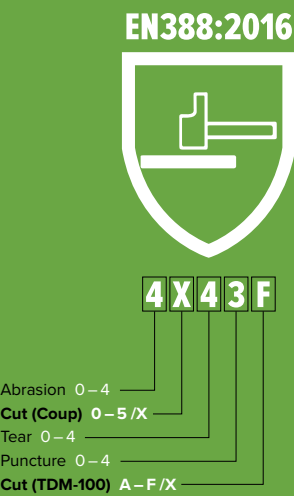

ANSI
U.S. STANDARD

Uses TDM-100 cut machine to test cut level (ISO 13997)

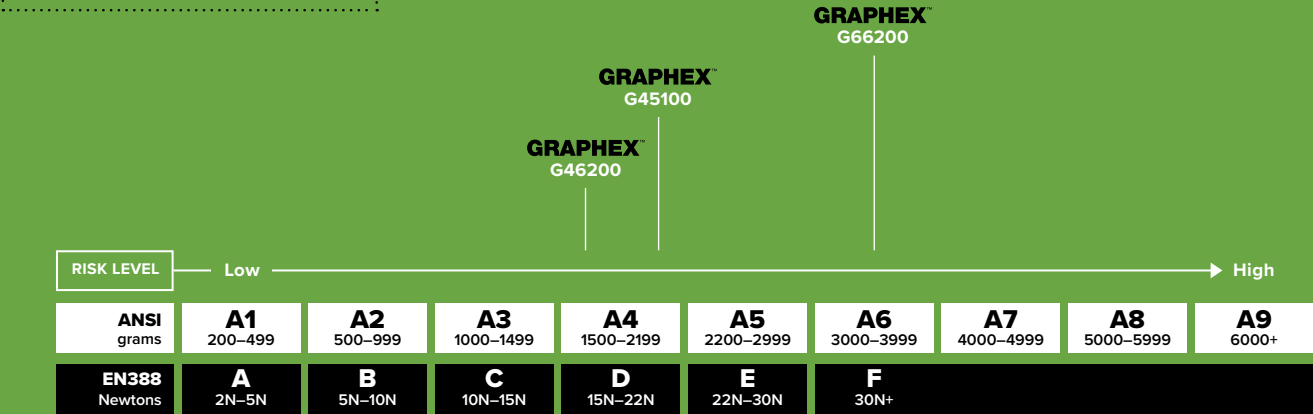

COMPARING ANSI/EN388 CUT LEVELS

UNDERSTANDING CHEMICAL STANDARDS


EN374-5

Indicates glove has passed test methods to protect against micro-organisms and fungi.



ISO 374-1

Specifies resistance to chemical permeation.

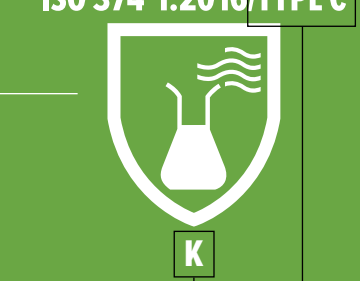

Code A – R: glove resistance against specific chemicals

Code	Chemical	CAS number	Class
A	Methanol	67-56-1	Primary alcohol
B	Acetone	67-64-1	Ketone
C	Acetonitrile	75-05-8	Nitrile composite
D	Dichloromethane	75-09-2	Chlorinated hydrocarbon
E	Carbon disulphide	75-15-0	Organic compound containing sulphur
F	Toluene	108-88-3	Aromatic hydrocarbon
G	Diethylamine	109-89-7	Amine
H	Tetrahydrofuranne	109-99-9	Heterocyclic ether compound
I	Ethyl acetate	141-78-6	Ester
J	n-Heptane	142-82-5	Saturated hydrocarbon
K	Sodium hydroxide 40%	1310-73-2	Inorganic base
L	Sulfuric acid 96%	7664-93-9	Inorganic mineral acid, oxidising
M	Nitric acid 65%	7697-37-2	Inorganic mineral acid, oxidising
N	Acetic acid 99%	64-19-7	Organic acid
O	Ammonia 25%	1336-21-6	Organic base
P	Hydrogen Peroxide 30%	7722-84-1	Peroxide
Q	Hydrofluoric acid 40%	7664-39-3	Inorganic mineral acid
R	Formaldehyde 37%	50-00-0	Aldehyde

Type A – C: time before chemical breakthrough at the molecular level

Protection type	Chemical breakthrough time
TYPE A	30 minutes (level 2) against minimum 6 test chemicals
TYPE B	30 minutes (level 2) against minimum 3 test chemicals
TYPE C	10 minutes (level 1) against minimum 1 test chemical

GLOVE SIZE SELECTION

THE RIGHT GLOVE IS THE RIGHT SIZE.


FIT FOR COMFORT: SINGLE USE
Selecting the right size glove is essential for optimal performance. A glove that fits too snugly put strains on the small hand muscles which leads to hand fatigue and discomfort.

Don a glove, and with your fingers stretched out, press the center of your palm with your other hand. If the glove is too tight, you will feel resistance and/or an air pocket between the glove and your palm.



ALL SW® GLOVES

To get an estimate of the correct size glove, measure the widest part of your hand with the chart to the right. Measure from the saddle of the thumb and index finger to the opposite side of your hand.

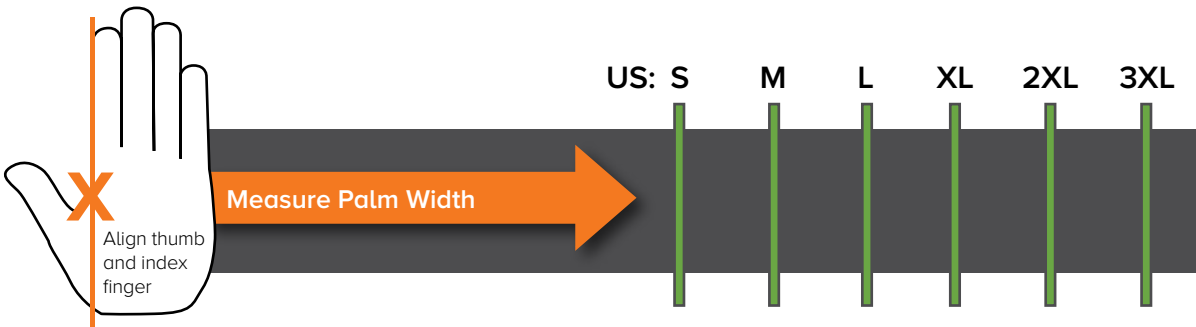

THE SW® WIDGET ABBREVIATION GUIDE

PF

PF-075-095-ECO-LB

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 7.5g (large size)	 9.5"	 5.4 mil	EcoTek®	 LIGHT BLUE

EcoTek

Core Brands	
TF	TrueForm™
PF	PowerForm®
PC	PowerChem™
MM	MegaMan®

Features	
BAL	Breach Alert™
DCO	Dry Core™
DRK	DriTek®
ECO	EcoTek®
GPT	GrepTile™
NRG	EnerGel™
PHN	pH Natural®
TTK	TracTek®

Colors	
BK	Black
BL	Blue
GR	Green
GY	Gray
HVGR	Hi-Vis Green
HVOR	Hi-Vis Orange
LB	Light Blue
LG	Light Green
NT	Natural
RB	Royal Blue
SB	Steel Blue
TL	Teal
WT	White
YW	Yellow

SPECIFICATION GUIDE

Part Number	Product Name	Old Name	Color	Finger Mil	Palm Mil	Weight	Outer Surface	AQL	Packaging	Page
Single-Use Powder Free Nitrile Exam										
N09130X	TF-036-095-LB	Supercede X3	Light Blue	4.3mil	2.5mil	3.6g	Finger Textured	1.0	200/Bx 2000/Cs	18
N12840X	TF-050-095-NRG-LG	AloeForm	Light Green	4.0mil	3.6mil	5.0g	Fully Textured	0.65	100/Bx 1000/Cs	18
N30134X	TF-050-095-RB	NEW	Royal Blue	4.7mil	3.1mil	5.0g	Textured	1.5	100/Bx 1000/Cs	18
N12533X	TF-051-095-PHN-BL	pH Natural	Blue	4.5mil	3.6mil	5.1g	Fully Textured	0.65	100/Bx 1000/Cs	20
N01588X	TF-060-095-BK	Stellar X5	Black	5.1mil	4.3mil	6.0g	Fully Textured	0.65	100/Bx 1000/Cs	20
N01032X	TF-066-095-SB	Vertex X6	Steel Blue	5.1mil	4.7mil	6.6g	Fully Textured	0.65	100/Bx 1000/Cs	20
N02740X	TF-075-120-LG	PowerForm X5+	Light Green	5.9mil	4.9mil	7.5g	Fully Textured	0.65	100/Bx 1000/Cs	22
N71688X	PF-065-095-ECO-BK	Stellar S6	Black	5.6mil	5.0mil	6.5g	Fully Textured	1.5	100/Bx 1000/Cs	28
N20036X	PF-065-095-ECO-TL	PowerForm S6	Teal	5.8mil	5.0mil	6.5g	Fully Textured	1.5	100/Bx 1000/Cs	28
N18947X	PF-065-095-NRG/ECO/BAL-GR/WT	NEW	Green / White	5.9mil	4.9mil	6.5g	Fully Textured	1.5	50/Bx 500/Cs	28
N12940X	PF-070-095-NRG-LG	AloeForm X6	Light Green	5.9mil	5.1mil	7.0g	Fully Textured	0.65	100/Bx 1000/Cs	30
N70631X	PF-075-095-ECO-LB	Supercede S6	Light Blue	6.1mil	5.4mil	7.5g	Fully Textured	1.5	100/Bx 1000/Cs	30
N01775X	PF-084-105-HVOR	Quasar X7	Hi-Vis Orange	5.6mil	5.1mil	8.4g	Fully Textured	0.65	100/Bx 1000/Cs	30
N10655X	PF-085-095-DCO-BL	Hydrex	Blue	6.9mil	6.1mil	8.5g	Fully Textured	0.65	50/Bx 500/Cs	32
N26050X	PF-088-095-DRK/ECO-GY	NEW	Gray	8.2mil	6.2mil	8.8g	Fully Textured	1.5	50/Bx 500/Cs	32
N09831X	PF-088-095-LB	Supercede X8	Light Blue	7.2mil	6.2mil	8.8g	Fully Textured	0.65	50/Bx 500/Cs	32
N90175X	PF-092-095-GPT/ECO-HVOR	NEW	Hi-Vis Orange	6.5mil	6.0mil	9.2g	GrepTile	0.65	100/Bx 1000/Cs	34
N80771X	PF-106-110-TTK/BAL-GR/YW	PowerForm S8+	Green / Yellow	7.0mil	5.5mil	10.6g	TracTek	1.5	50/Bx 500/Cs	34
N12736X	PF-107-120-TL	PowerForm	Teal	7.1mil	6.2mil	10.7g	Fully Textured	0.65	50/Bx 500/Cs	34
N26088X	MM-128-110-DRK-BK	MegaMan	Black	10.1mil	8.5mil	12.8g	Fully Textured	1.5	50/Bx 500/Cs	44
N26341X	MM-128-110-DRK/NRG-HVGR	AloeTuff	Hi-Vis Green	10.1mil	8.5mil	12.8g	Fully Textured	1.5	50/Bx 500/Cs	44
N77235X	MM-211-120-BL	PowerForm S12+	Blue	14.0mil	12.0mil	21.1g	Fully Textured	0.65	50/Bx 500/Cs	44
Single-Use Powder Free Neoprene Exam										
K00140X	PC-079-095-GR	NeoForm X8	Green	6.2mil	4.7mil	7.9g	Fully Textured	1.50	100/Bx 1000/Cs	38
K07140X	PC-121-115-GR	NeoForm X9+	Green	7.5mil	5.9mil	12.1g	Fully Textured	1.50	50/Bx500/Cs	38
Single-Use Powder Free Natural Rubber Exam										
N12533X	TF-090-095-TTK-NT	Hypersense X9	Natural	7.0mil	6.3mil	9.0g	TracTek	1.5	100/Bx 1000/Cs	22


Part Number	Product Name	Liner Material	Coating Material	Color	Cut Level	Abrasion Level	Gauge	Grip Finish	Fit Type	Packaging	
Cut-Resistant											
G45100X	GraphEx™ G45100	AxiFybr™	Nitrile	Gray / Black	ANSI A4	ANSI 5	18	Smooth	Hand Specific	12 Pairs/Bag, 6 Bags/Cs	51
G46200X	GraphEx™ G46200	AxiFybr™	Nitrile	Gray / Black	ANSI A4	ANSI 6	18	Sandy	Hand Specific	12 Pairs/Bag, 6 Bags/Cs	51
G66200X	GraphEx™ G66200	AxiFybr™	Nitrile	Gray / Black	ANSI A6	ANSI 6	13	Sandy	Hand Specific	12 Pairs/Bag, 6 Bags/Cs	51

Part Number	Product Name	Liner Material	Coating Material	Color	Puncture Level	Abrasion Level	Grip Finish	Fit Type	Packaging	
Chemical-Resistant - Nitrile										
N50109X	TexSolv® U11	N/A	N/A	Green	ANSI 2	ANSI 6	Recessed Diamond	Hand Specific	12 Pairs/Bag, 12 Bags/Cs	55
N50509X	TexSolv® U15	N/A	N/A	Green	ANSI 3	ANSI 6	Recessed Diamond	Hand Specific	12 Pairs/Bag, 12 Bags/Cs	55
N51509X	TexSolv® F15	Advanced Flocking	N/A	Green	ANSI 3	ANSI 6	Recessed Diamond	Hand Specific	12 Pairs/Bag, 12 Bags/Cs	55
Chemical-Resistant - Natural Rubber Latex										
L50307X	CoreSafe® U13B	N/A	N/A	Blue	ANSI 1	ANSI 3	Fish Scale	Hand Specific	12 Pairs/Bag, 12 Bags/Cs	57
L51300X	CoreSafe® F13Y	Cotton Flock	N/A	Yellow	ANSI 1	ANSI 3	Fish Scale	Hand Specific	12 Pairs/Bag, 12 Bags/Cs	57
L50703X	CoreSafe® U17N	N/A	N/A	Natural	ANSI 1	ANSI 3	Fish Scale	Hand Specific	12 Pairs/Bag, 12 Bags/Cs	57
L51901X	CoreSafe® F28O	Cotton Flock	N/A	Orange	ANSI 2	ANSI 3	Raised Diamond	Hand Specific	12 Pairs/Bag, 12 Bags/Cs	57
L51925X	CoreSafe® F28YB	Cotton Flock	Neoprene	Yellow / Blue	ANSI 1	ANSI 3	Raised Diamond	Hand Specific	12 Pairs/Bag, 12 Bags/Cs	57

CONTACT SW®

Customer Service
info@swsafety.com
Main: +1 510.429.8692
Fax: +1 510.487.5347

Mark Cuerden
EMEA Manager
P: +44 7710.593.829
mcuerden@swsafety.com

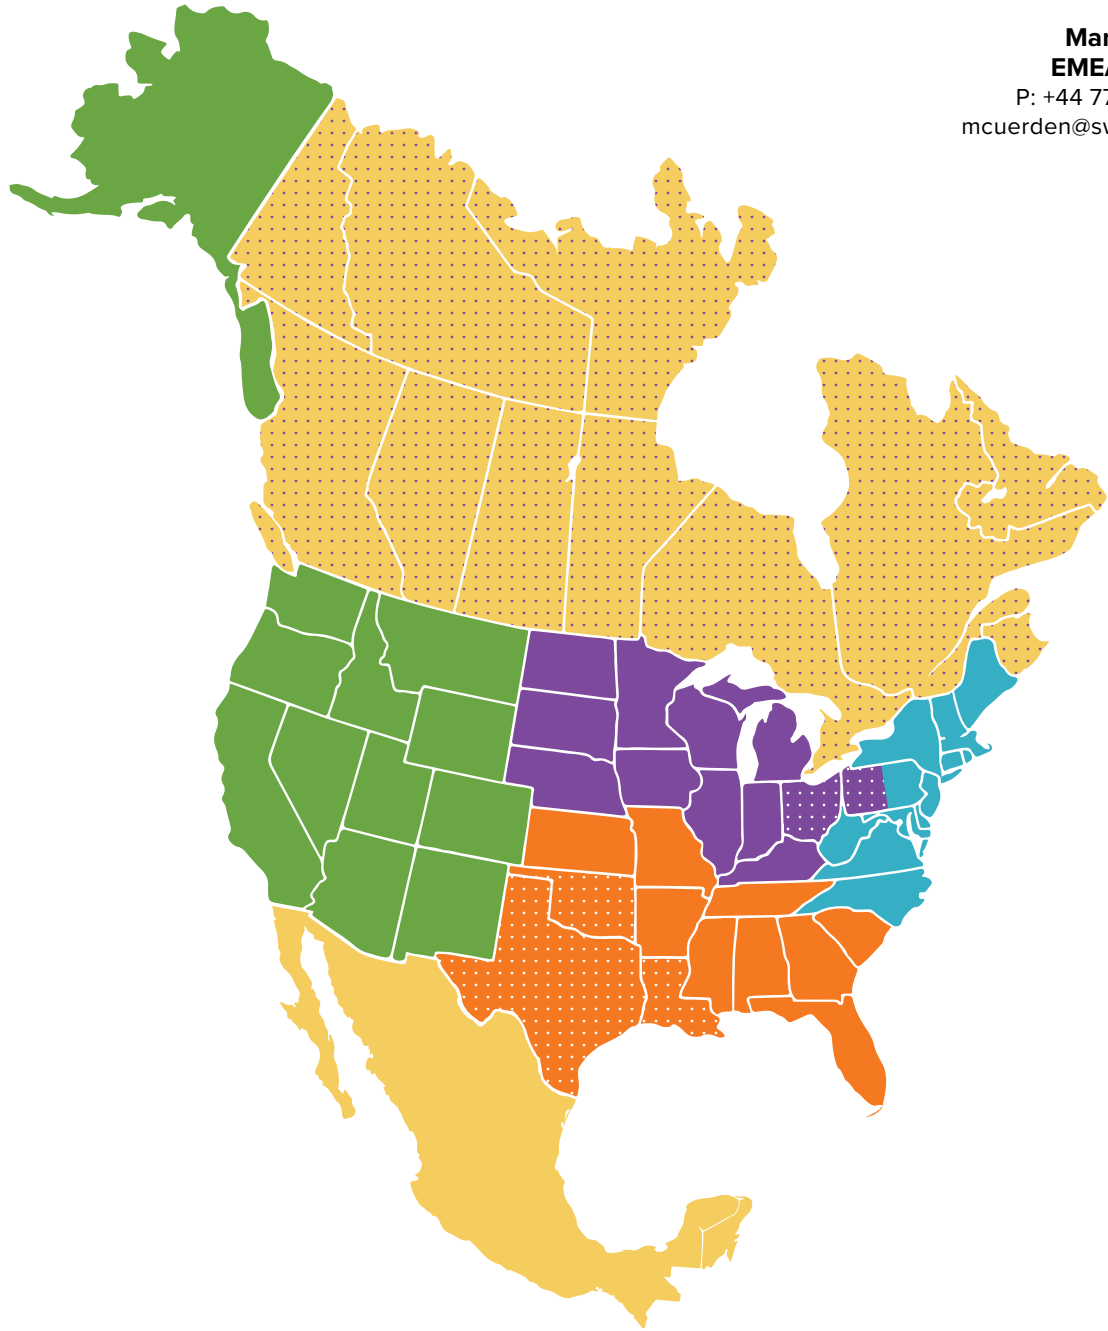

Tammy Metz Regional Manager P: 801.641.3636 tmetz@swsafety.com	Mike Kimberley Regional Manager P: 740-502-1268 mkimberley@swsafety.com	Dave Elliott Regional Manager P: 615.481.4671 delliott@swsafety.com	Scott Cores Regional Manager P: 740.361.9248 scores@swsafety.com
Brian Perry Regional Manager P: 414.975.4194 bperry@swsafety.com	Geoff Gascon Territory Manager P: 519.580.5338 ggascon@swsafety.com	Melissa Chavez-Williams Territory Manager P: 972.880.9669 mcwilliams@swsafety.com	Kyle Shutt Territory Manager P: 740.610.8380 kshutt@swsafety.com



SWSafety.com

